

30
YEARS
OF
LUMINOUS

gosolar
with LUMINOUS




**Complete
Solar Solutions**

Chalo India Bijli Banao



PRODUCT CATALOGUE 2021

Solar PV Panels

Designed For High Performance

5 & 12 YEARS*
WARRANTY



Range - 40Wp to 380Wp



**EXCELLENT LOW-LIGHT
PERFORMANCE**



**RESILIENCE TO
EXTREME WEATHER**



**PID RESISTANCE
TECHNOLOGY**



**ADVANCE EVA
ENCAPSULATION**



**CONVERSION
BEST IN
CLASS EFFICIENCY**


*5 years below 300W & 12 years above 300W

Grid Tie Inverters

Safe And Efficient



Range - 1KW to 80KW



MAXIMUM POWER
POINT TRACKING



IP65
PROTECTION



REMOTE
MONITORING



ANTI-ISLANDING
PROTECTION



EXPORT EXCESS
POWER GENERATED

Microinverter

Plug And Play

12 YEARS WARRANTY



Range - 1.5KW



PRODUCTIVE



SMART



RELIABLE



SAFE



ENHANCED
MONITORING SYSTEM

Power Conditioning Unit

High Capacity And Control




Range - 1.25KVA to 12.5KVA



**PRIORITY
SETTINGS**



**USER-FRIENDLY
DISPLAY**



**MAXIMUM POWER
POINT TRACKING**



**GUARANTEED
SAFETY**

Solarverter Pro PCU

Superior Performance

**2 YEARS
WARRANTY**




Range - 2KVA to 6KVA



**SMART SOLAR
OPTIMIZATION**



**USER-FRIENDLY
LCD DISPLAY**



**MAXIMUM POWER
POINT TRACKING**



**GUARANTEED
SAFETY**



**REMOTE
MONITORING**

Hybrid Inverter

Best Of 2 Worlds



Range - 3.75KVA to 5KVA



**PRIORITY
SETTINGS**



**USER-FRIENDLY
LCD DISPLAY**



**REMOTE
MONITORING**



**ANTI-ISLANDING
PROTECTION**



**EXPORT EXCESS POWER &
ALSO GET BACKUP**

Cruze Combo

Solar Solutions With Tough Build



1 & 2 YEARS*
WARRANTY

Range - 2KVA to 3.5KVA



**EFFICIENT HEAVY
LOAD HANDLING**



**USER FRIENDLY
LCD DISPLAY**



**PURE SINE
WAVE OUTPUT**



**INTELLIGENT BATTERY
CHARGING ALGORITHM**



**GUARANTEED
SAFETY**

iCruze Combo

Solar Solutions With Tough Build



1 & 2 YEARS*
WARRANTY

Range - 2.8KVA to 9.5KVA



**EFFICIENT HEAVY
LOAD HANDLING**



**USER FRIENDLY
LCD DISPLAY**



**PURE SINE
WAVE OUTPUT**



**INTELLIGENT BATTERY
CHARGING ALGORITHM**



**GUARANTEED
SAFETY**

Solar Inverters

For Savings And Backup

**2 YEARS
WARRANTY**



**NXG+ 750, NXG+ 1100,
NXG+ 1400, NXG+ 1600**



ISOT
TECHNOLOGY



FAST
CHARGING



ECO AND
UPS MODE



SAFETY AND
PROTECTION



PURE SINE
WAVE OUTPUT

Shine Retrofit


Smart Upgrade To Solar



Range - 20A/12V to 50A/120V



**SOLAR OPTIMIZATION
TECHNIQUE**



**LCD
DISPLAY**



**FOUR STAGE
CHARGING**




**MCB
PROTECTION**

Charge Controller

Easy Upgrade To Solar



Range - 6A/12V to 20A/24V



USB PORT AVAILABLE
FOR RUNNING
DC DEVICES



PROTECTION AGAINST
OVER-CHARGE AND
REVERSE CURRENT

Solar Battery

Power Of Performance

3 & 5 YEARS*
WARRANTY



Range - 20Ah to 200Ah



**VERY LOW
MAINTENANCE**



**LONGER
DESIGN LIFE**



**HIGH TEMPERATURE
PERFORMANCE**

*3 & 5 Years - Free replacement
5 Years - 36 Months Free Replacement & 24 Months Pro-rata

One Stop Destination

For All Solar Related Information



A Complete Guide To Solar For Business

Subscribe to the  YouTube Channel
to understand solar better





Luminous Power Technologies Pvt. Ltd.

Plot No. 150, Sector 44, Gurugram, Haryana - 122003

Tel.: +91-124-477 6700 E-mail: care@luminousindia.com



/myluminous



/myluminous



/myluminousindia



www.luminousindia.com

"Photographs of the Products shown above are indicative only. Owing to continuous innovation and improvements, actual product may vary in design, description, colors and color combinations from one shown herein. Care has been taken to ensure that information contained herein is correct and updated from time to time. Luminous Power Technologies Private Limited, however, takes no responsibility of the variations and reserves its right to make changes in the data/details, without any prior intimation or notice."

LUMINOUS
Khushiyon ka ghar

YEARS
OF **30**
LUMINOUS

Complete Solar Solutions

————— *Making the World a Better Place with Every Rooftop* —————

 **Solar**

PRODUCT CATALOGUE 2020

LUMINOUS



30 YEARS OF MAKING HOMES HAPPIER

With a legacy of over 30 years in powering households and empowering India, Luminous continues to challenge itself to exceed customers expectations and its true potential.



7 Factories



28 Sales Offices



60000+
Channel Network



70+ Mn Happy
Consumers



Expert
Craftsmanship



Top-of-the-line
Products

30
YEARS
OF
LUMINOUS

LUMINOUS



Mono PERC
Panel

370W



Polycrystalline
Panels

40W - 330W

WIDEST RANGE OF SOLAR PRODUCTS



NXT+ PCU

1.25 kVA - 12.5 kVA



NXG+
Inverter

400VA - 1100VA



Shine
Retrofit

12V - 120V



NXi
Grid Tie
Inverter

1kW - 60kW



Microinverter

1.5kW



iCruze
Combo

3KVA - 10KVA



Cruze
Combo

2KVA - 7.5KVA



Charge
Controller

12V - 24V



Solar
C10 Rated
Batteries

20 Ah - 200 Ah

LUMINOUS

Home Solutions



Solar Panel, NXG+
Inverters & Batteries

Home Upgrade* Solutions



Solar Panel, Shine
Retrofit & Batteries

DC Solutions



Solar Panel, Charge
Controller & Batteries

*For upgrading existing power back up system.

ONE STOP SOLAR SOLUTIONS

Luminous is a global powerhouse as well as a local favourite in the solar solutions segment. Our best-in-class products and top-of-the-line workmanship, assure you of a hasslefree journey.

High Capacity Solutions



Solar Panel, NXT+ PCU & Batteries

High Capacity Upgrade* Solutions



Solar Panel, Cruze+Shine Combo & Batteries

Grid-Tie Solutions



Solar Panel & Solar NXi Grid Tie Systems

LUMINOUS

PV PANELS

Designed For High Performance


Luminous offers a range of both Mono PERC and Polycrystalline PV modules. Ranging from 40W to 370W, our panels comply with IEC standards and are suitable for a wide range of applications.




25 Years
Performance Warranty



5 & 12 Years*
Product Warranty



Robust
Mechanical Design

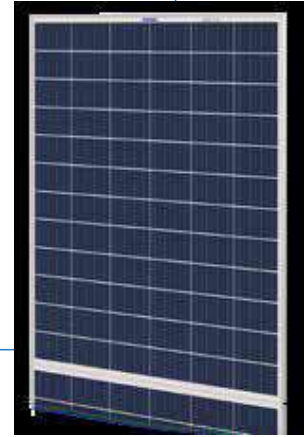

Excellent Low-light Performance

Built with high quality glass and solar cell surface coating, especially for performance in low-light conditions.



Resilience to Extreme Weather

The robust waterproof, corrosion and torsion resistant design offers protection against wind and snow.



PID Resistance Technology

Designed to eliminate power loss owing to stray currents

Advance EVA Encapsulation

Designed with multi layer EVA (ethyl vinyl acetate) encapsulation for better module protection.

Best in Class Efficiency

Innovative cell technology ensures optimum solar power generation providing high value for money.

IDEAL FOR

- ✓ Large scale utility systems
- ✓ Rooftop residential, commercial and industrial roof top installations
- ✓ Agricultural pumping applications

*Refer models for respective warranty

Electrical Parameters @ STC#

Model	LUM 1240	LUM 1260	LUM 1280	LUM 12105	LUM 12165	LUM 24330	LUM 24370MP
Cell Type	Poly	Poly	Poly	Poly	Poly	Poly	Mono PERC
No. of Cells	36	36	36	36	36	72	72
Peak Power P _{Max} (Wp)	40	60	80	105	165	330	370
Rated Module Voltage (V)	12	12	12	12	12	24	24
Maximum Power Voltage V _{mp} (V)	18	18	18	18.05	18.65	38.03	39.25
Maximum Power Current I _{mp} (A)	2.23	3.34	4.4	5.82	8.85	8.68	9.43
Open Circuit Voltage Voc (V)	22	22	22	22	22.84	45.53	47.08
Short Circuit Current I _{sc} (A)	2.42	3.64	4.8	6.28	9.55	9.22	10.01
Module Efficiency (%)	13.72%	14.10%	15.21%	15.14%	16.64%	16.85%	18.89%
Maximum System Voltage (V)	600V	600V	600V	600V	600V	1000V	1500V
Maximum Series Fuse Rating	12A	12A	12A	12A	20A	20A	20A

#STC (1000W/m²), AM1.5, cell temperature 25°C. Power Tolerance : 0/+5%. Power measurement accuracy:±3%

Mechanical Data

Module Dimensions (mm)	435x670	635x670	785x670	1035x670	1480x670	1976x991
LxWxT	x34	x34	x34	x34	x34	x35
Module Weight (kgs)	3.30	5.20	6.50	8.20	11.50	22.50
IP Rating	IP 65	IP 65	IP 65	IP 65	IP 65	IP 67
Cable & Connectors	No cable and connectors		1000mm length cables		1000mm length cables, MC4 Compatible/MC4 Connectors	
Frame	Silver Anodized aluminium alloy					
Glass	3.2mm thick high transmission low iron tempered glass, AR coated					
Cell Encapsulant	EVA (Ethylene Vinyl Acetate)					
Back Sheet	Composit Film					
Maximum Surface Load Capacity	5400 Pa (Pascals)					
Application Class	Class A (Safety Class II)					

Permissible Operating Conditions






Operating Temperature	-40°C to +85°C
Temp coefficient of Open Circuit Voltage	-0.33 %/°C
Temp coefficient of Short Circuit Current	0.03 %/°C
Temp coefficient of Power	-0.41 %/°C

Warranty and Certifications

Product Warranty**	5 Years	12 Years
Performance Warranty**	Linear Performance Warranty for 25 Years with 3% for 1st year degradation and 0.70% from year 2 to 25	
Approvals and Certificates	IEC 61215 Ed2, IEC 61701, IEC 61730-1, IEC 61730-2	

** Refer to Luminous Warranty document for Terms and conditions.
Technical specifications are subject to change without prior notice.

Solar Module Dimension

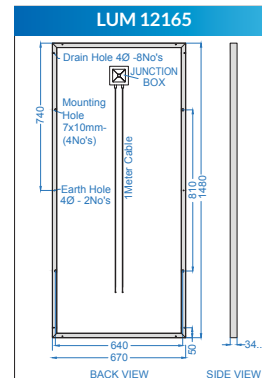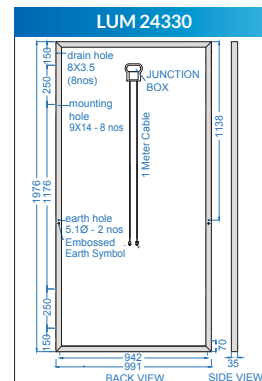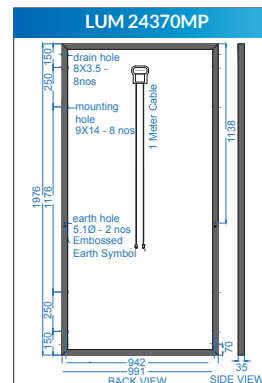

LUMINOUS

GRID TIE INVERTERS

Safe and Efficient


The NXi range from Luminous is available in single and three phase configurations. With best-in-class reliability and compliance to safety standards, the inverters are available in capacities from 1kW to 60 kW.



5 Years
Warranty



> 97%
Efficiency



Connectivity
Options

MPPT

Maximum Power Point Tracking

MPPTs to extract up to 30% more power from the panels, minimizing impact of shading and increasing efficiency.



IP65 Protection

Designed to work in tough weather conditions. Flawless operation despite dust, rain or extreme temperature variations



Remote Monitoring

Multiple modes of connectivity (GSM/Wi-fi) for remote monitoring enables proactive maintenance.

Anti-Islanding Protection

Disconnects the inverter from grid during power failure preventing any electrical shock to the linemen at work.



MNRE & IEC Compliance

Complies with MNRE recommended standards
IEC - 61683, IEC - 60068,
IEC - 61000, IEC - 61727,
IEC - 62116



Solar Estimation Chart

Solution		No. of MPPT	Panel Connection Combination per MPPT (Series-Parallel)	Approx. Roof Top Area Required (Sq. ft.)
Solar UPS	PV Panel Watt			
NXI 1kW	330Wp x 3 No.s	1	3 (S)	100
NXI 2kW	330Wp x 6 No.s	1	6 (S)	200
NXI 3kW	330Wp x 10 No.s	1	10 (S)	300
NXI 4kW	330Wp x 12 No.s	2	6 (S)	400
NXI 5kW	330Wp x 16 No.s	2	8 (S)	500
NXI 6kW	330Wp x 20 No.s	2	10 (S)	600
NXI 10kW	330Wp x 32 No.s	2	16 (S)	1000
NXI 15kW	330Wp x 48 No.s	2	12 (S) 2 (P)	1500
NXI 20kW	330Wp x 64 No.s	4	16 (S)	2000
NXI 25kW	330Wp x 84 No.s	4	21 (S)	2500
NXI 50kW	330Wp x 168 No.s	4	21 (S) 2 (P)	5000



LUMINOUS

Single Phase

MODEL	Nxi 110	Nxi 120	Nxi 130	Nxi 140	Nxi 150
Input DC					
Max. DC Input Power (kW)	1.2	2.3	3.5	4.6	5.8
Max. DC Input Voltage (V)	600				
Start-up Voltage [V]	60	90		120	
MPPT Voltage range (V)	50-500	80 - 500		100 - 500	
Max input current per MPPT (A)	11A			11A+11A	
Number of MPPT	1			2	
Max Input Strings Number	1			2	
Output (AC)					
Rated output power (kW)	1	2	3	4	5
Max. output power [kW]	1.1	2.2	3.3	4.4	5
Max. output Current [A]	5.2	10.5	15.7	21	25
Grid voltage range (V)	160-285				
Grid Frequency range (Hz)	50/60 Hz				
Power Factor (at rated output power)	0.8 ...1... 0.8				
Total harmonic distortion [THDi]	< 1.5%				
Feed-in phase/connection phase	Single Phase				
Efficiency					
Max. Efficiency	>97.2%		97.5%	> 98.1%	
MPPT Efficiency	>99.5%				
Protection					
Inbuilt Protections	DC Reverse Polarity Protection, Short Circuit Protection, O/P Over Current Protection, O/P Over voltage protection, Insulation resistance monitoring, Residual current detection, surge protection, Islanding Protection, Temperature Protection				
Interface					
DC Connection	MC4 Connectors				
Display	LCD 2X 20 Z				
Datalogger & Communication	RS485/GSM/Wifi* (Optional)				
General Data					
Topology	Transformerless				
Consumption @ night	< 1 W				
Operating Temperature Range	-25°C to 60°C				
Cooling Method	Natural Convention				
Relative Humidity	0 - 100 %				
Max. Operational Altitude	4000m				
Noise [dBA]	<20dBA	<30dba		<30 dba	
Designed Lifetime	> 20 years				
Ingress Protection	IP65				
Dimensions (W*H*D) [mm]	310W*373H*160D(mm)			310W *543H *160D	
Net weight (Kg)	7.4	7.7		11.5	
Standards					
Safety/EMC	IEC62109-1/-2, NB/T 32004, EN61000-6-1, EN61000-6-3				

* Check availability of GSM or wifi dongle before ordering.

Technical specifications are subject to change without prior notice.

Three Phase

MODEL	Nxi 305	Nxi 306	Nxi 308	Nxi 310	Nxi 312	Nxi 315
Input DC						
Max. DC Input Power (kW)	6.0	7.2	9.6	12	14.5	18
Max. DC Input Voltage (V)	1000					
Start-up Voltage [V]	180					
MPPT Voltage range (V)	160 - 1000					
Max input current per MPPT (A)	11A + 11A			22A+22A		
Number of MPPT	2					
Max Input Strings Number	2			4		
Output (AC)						
Rated output power (kW)	5	6	8	10	12	15
Max. output power [kW]	5.5	6.6	8.8	11	13.2	16.5
Max. output Current [A]	8.4	10	13.4	16.7	20.1	25.1
Grid voltage range (V)	313 - 470					
Grid Frequency range (Hz)	50/60 Hz					
Power Factor (at rated output power)	0.8 ...1... 0.8					
Total harmonic distortion [THDi]	<2%					
Feed-in phase/connection phase	Three Phase					
Efficiency						
Max. Efficiency	98.30%			98.60%		
MPPT Efficiency	99.5%					
Protection						
Inbuilt Protections	DC Reverse Polarity Protection, Short Circuit Protection, O/P Over Current Protection, O/P Over voltage protection, Insulation resistance monitoring, Residual current detection, surge protection, Islanding Protection, Temperature Protection, Integrated DC Switch (optional)					
Interface						
DC Connection	MC4 Connectors					
Display	LCD 2X 20Z					
Datalogger & Communication	4 pins RS485 connector			4 pins RS485 connector		
General Data						
Topology	Transformerless					
Consumption @ night	< 1 W					
Operating Temperature Range	-25°C to 60°C					
Cooling Method	Natural Convection				Intelligent redundant fan cooling	
Relative Humidity	0 to 100%					
Max. Operational Altitude	4000m					
Noise [dBA]	<30 dBA					
Designed Lifetime	> 20 years					
Ingress Protection	IP65					
Dimensions (W*H*D) [mm]	310W*563H*129D			310W*608H*219D		
Net weight (Kg)	14.1			19.9		
Standards						
Safety/EMC	IEC 62109-1, 62109-2: AS3100					

* Check availability of GSM or wifi dongle before ordering.

Technical specifications are subject to change without prior notice.

LUMINOUS


Three Phase

MODEL	Nxi 320	Nxi 325	Nxi 330	Nxi 350	Nxi 3600
Input DC					
Max. DC Input Power (kW)	24	28	34	55	72
Max. DC Input Voltage (V)	1000			1000	1100
Start-up Voltage [V]	180	350		200	200
MPPT Voltage range (V)	160 - 1000	200 - 800		200 - 1000	200-1000
Max input current per MPPT (A)	22A+22A	18A + 18A + 18A + 18A		28.5A + 28.5A + 28.5A + 28.5A	28.5A + 28.5A + 28.5A + 28.5A
Number of MPPT	2	4		4	4
Max Input Strings Number	4	8		12	12
Output (AC)					
Rated output power (kW)	20	25	30	50	60
Max. output power [kW]	22	27.5	33	55	66
Max. output Current [A]	33.3	41.7	50	83.3	100
Grid voltage range (V)	313 - 470	304-460			
Grid Frequency range (Hz)	50/60 Hz	47-52 or 57-62			
Power Factor (at rated output power)	0.8 ...1... 0.8				
Total harmonic distortion [THDi]	<2%	<3%			<2%
Feed-in phase/connection phase	Three Phase				
Efficiency					
Max. Efficiency	98.60%	98.60%		98.80%	99%
MPPT Efficiency	99.5%	99.90%			99.50%
Protection					
Inbuilt Protections	DC Reverse Polarity Protection, Short Circuit Protection, O/P Over Current Protection, O/P Over voltage protection, Insulation resistance monitoring, Residual current detection, surge protection, Islanding Protection, Temperature Protection, Integrated DC Switch (optional)				
Interface					
DC Connection	MC4 Connectors				
Display	LCD 2X 20Z	7" Color Screen Display		LCD 2X 20Z	
Datalogger & Communication	4 pins RS485 connector	4 pins RS485 connector, 2 RJ45 connector		4 pins RS485 connector, 2 RJ45 connector, 2 Group of terminal block	
General Data					
Topology	Transformerless				
Consumption @ night	< 1 W				
Operating Temperature Range	-25°C to 60°C				
Cooling Method	Natural Convention		Intelligent redundant fan cooling		
Relative Humidity	0 to 100%				
Max. Operational Altitude	4000m				
Noise [dBA]	<30 dBA		<60 dBA		
Designed Lifetime	> 20 years				
Ingress Protection	IP65				
Dimensions (W*H*D) [mm]	310W*608H*219D	530W*700H*356.5D		630W*700H*357D	
Net weight (Kg)	19.9	58.2		63	69
Standards					
Safety/EMC	IEC 62109-1, 62109-2: AS3100	IEC62109-1/-2, AS3100, EN61000-6-1, EN61000-6-3			

* Check availability of GSM or wifi dongle before ordering.

Technical specifications are subject to change without prior notice.

For more information

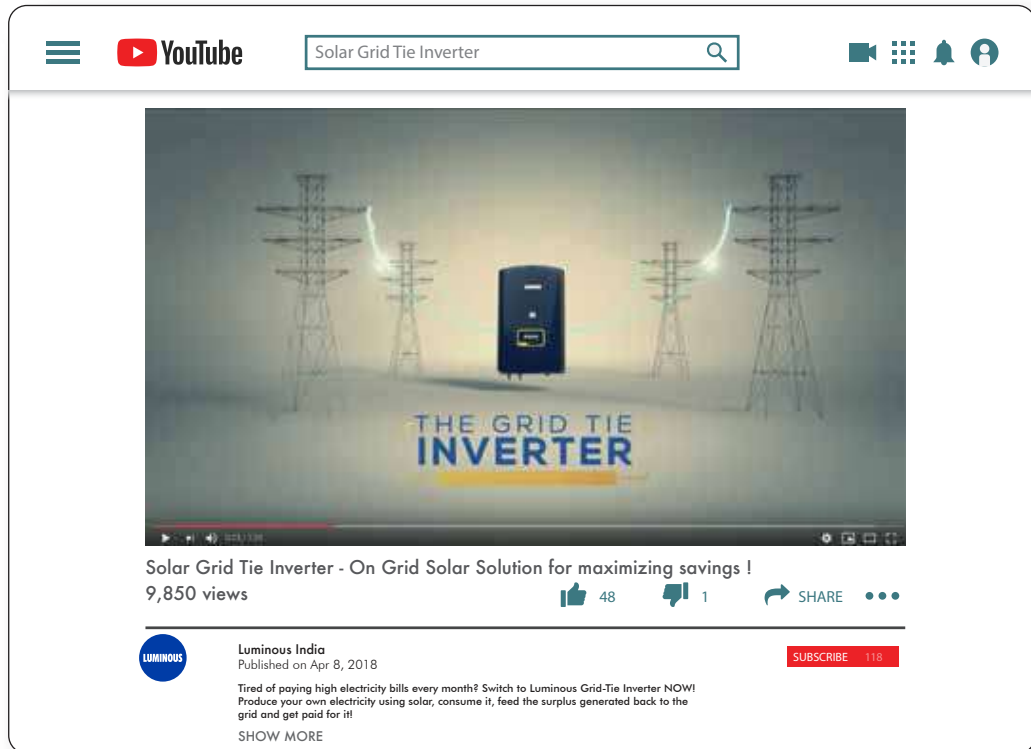

Subscribe to our Channel



youtube/user/myluminousindia

Follow our Social Media Channels & Visit our Website for Blogs, Videos & more product information.

LUMINOUS


MICROINVERTER

Plug and Play


Microinverter connects to four solar modules to convert DC power into grid-compliance AC power. It improves energy harvest, increases reliability and dramatically simplifies design, installation and management of solar power systems.



12 Years
Warranty



>96%
Efficiency



Connectivity
Options



Productive

- Maximum Energy Production
- Superior Performance in Shaded Conditions




Smart

- Quick and sleek design,
- simple installation management



Reliable

- No single point of failure

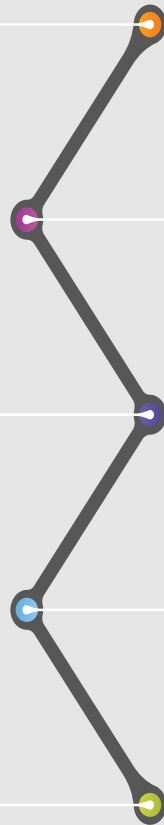

Safe

- Low Voltage DC
- Reduced fire risk



Enhanced Monitoring System

- Precise monitoring of each solar panel
- Detailed real time information & guidance for maintenance





Accessory	Function
Data Transfer Unit	Provided to transfer data from microinverter to monitoring server
Male Connector	Provided to make AC end cable
Male End Cap	Provided to seal AC male connector of microinverter
Female Connector	Provided to seal AC end cable
Female End Cap	Provided to seal AC female connector of microinverter

Microinverter Accessories



Data Transfer Unit



Male Connector



Male End Cap



Female Connector




Female End Cap

LUMINOUS

Technical Specifications

Model	LMI 1500
Input Data (DC)	
Max. DC Input Power (W)	1880W/ up to 470 Wp per MPPT
Peak Power MPPT Voltage Range (Vmp)	36-48
Start-up voltage (V)	22
operating voltage range (Voc)	16-60
Maximum Input Voltage (V)	60
Maximum Input Current (A)	11.5
Output Data (AC)	
Rated output power (kW)	1.5 kW
Rated output current (A)	6.81
Grid voltage range (V)	208-230
Grid frequency range (Hz)	50/60 Hz
Power factor (at rated output power)	>0.99
Total harmonic distortion (THDi)	<5%
Maximum units per branch	3
Efficiency	
Peak Inverter efficiency	96.60%
CEC weight efficiency	96.50%
Normal MPPT efficiency	99.80%
Protection	
Inbuilt Protection	DC Reverse Polarity Protection, Surge Protection, O/P Over Current Protection, O/P Over Voltage Protection, Ingress protection, Short Circuit Protection, Temperature Protection
Interface	
DC Connection	AC Male, Female Connector; AC Male, Female End Cap
Communication	Wireless
Monitoring	DTU (GSM/ Wi-Fi)
General Data	
Consumption @ Night	<50 mW
Ambient temperature range (°C)	-40~ + 65
Operating temperature range (°C)	-40~ + 85
Ingress Protection	IP67
Cooling	Natural convection - No fans
Design lifetime	>25 years
Dimension (WxHxD mm)	280x176x33
Net Weight (kg)	3.75 (including 1.9m AC cable)

For more information

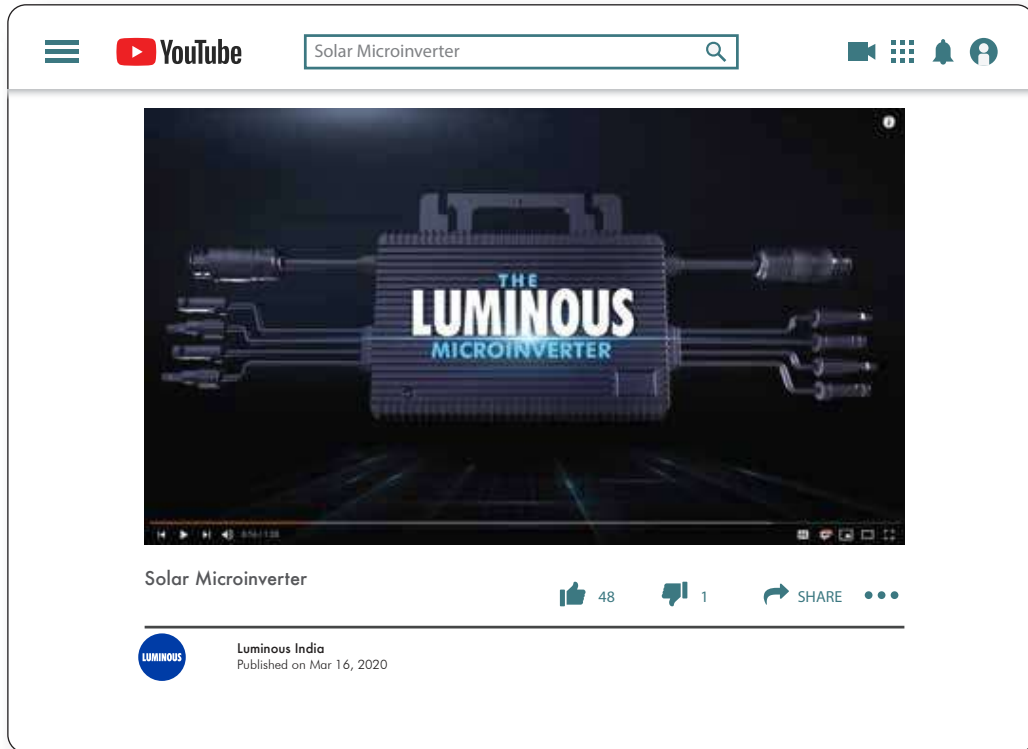

Subscribe to our Channel



youtube/user/myluminousindia

Follow our Social Media Channels & Visit our Website for Blogs, Videos & more product information.



POWER CONDITIONING UNIT

High Capacity & Control

The NXT+ range of PCUs is the ideal solution for Off-grid applications. Designed to offer control, the PCU intelligently optimizes battery charging and power to load among Solar, Battery and Grid power. Available from 1.25kVA to 12.5kVA.


Warranty: 2 Years



High Efficiency
MPPT



User Controlled
Settings



Long Power
backup



Priority Settings

Priority settings allow the user to choose among reduced grid dependency & energy savings, enhanced backup and autonomy from grid.



User-friendly Display

A user friendly display communicates important parameters like discharge time, grid availability, selected priority setting etc.



Maximum Power Point Tracking

MPPTs extract 30% more power as compared to UPS with PWM charge controllers.

Guaranteed Safety

Comprehensive protection features include short-circuit, reverse polarity, battery over-charge etc.



MNRE & IEC Compliance

Complies with MNRE recommended standards IEC – 61683, IEC – 60068 – 1,2,14,30, IEC – 60529



Solar Estimation Chart

Solution			Panel Connection Combination (Series-Parallel)	Approx. Roof Top Area Required (Sq. ft.)
Solar UPS	Solar Battery	PV Panel Watt		
NXT+ 1.25 kVA	80 Ah x 4	330Wp x 3 No.s	3 (S)	100
NXT+ 2.5 kVA	150 Ah x 4	330Wp x 6 No.s	3 (S) 2 (P)	200
NXT+ 3.75 kVA	200 Ah x 4	330Wp x 9 No.s	3 (S) 3 (P)	300
NXT+ 7.5 kVA	200 Ah x 8	330Wp x 20 No.s	4 (S) 5 (P)	600
NXT+ 9.5 kVA	200 Ah x 10	330Wp x 24 No.s	6 (S) 4 (P)	750
NXT+ 12.5 kVA	200 Ah x 10	330Wp x 30 No.s	6 (S) 5 (P)	1000




LUMINOUS

Technical Specifications

Model Name	NXT+ 1.25 kVA	NXT+ 2.5 kVA	NXT+ 3.75 kVA	NXT+ 7.5 kVA	NXT+ 9.5 kVA	NXT+ 12.5 kVA
Capacity (kW)	1	2	3	6	7.5	10
Nominal Battery Voltage (Vdc)	48V		96V		120V	
Output Waveform	Sine Wave					
SOLAR PHOTOVOLTAIC INPUT						
Type of Charger	MPPT					
Maximum PV power (kW)	1	2	3	6	7.5	10
Input Voltage range (Voc)	80 - 165			160-240	180-300	
Input Voltage range (Vmp)	65 - 130			120-210	150-240	
GRID INPUT						
Input Supply Phases	Single Phase					
Nominal Voltage & Voltage range	230V AC (185V - 265V)					
Nominal Frequency & Range	50 Hz (±3 Hz)					
BATTERY						
Battery recharge current range from Grid Side (A)	0-12	0-24	0-30	0-30	0-35	0-45
Battery recharge current range from Array Side (A)	0-20	0-40	0-60	0-60	0-65	0-80
Charging Stages	Float, Bulk, Boost				Boost, Absorption, Float	
UPS						
Switching Element	MOSFET			IGBT		
Control	32 Bit DSP controlled					
Nominal Output V _{AC}	230V ± 1% , Single Phase					
Output waveform	Pure Sine Wave					
Nominal Frequency	50 Hz (±0.5 Hz)					
Power Factor	0.8 lag to 0.8 lead					
Nominal Output Current (A)	4.3	8.5	13	26	33	44
Overload at nominal output voltage	110% for 10 Minutes, 200% for 5 Secs					
SYSTEM DATA						
Noise @ 1 meter (dBA ± 2dBA)	<58dBA			<62dBA		
Transfer Time	<20 mS					
Protection	Under/Over voltage protection for Input, Output, Battery & Array; Reverse polarity protection for Array & Battery; Protection for Output Overload, Short circuit and Over Temperature; MCB & Surge protection at Grid/DG Input, Battery, Array Path and PCU O/P					
Display Parameters	Voltage/Current: Array, Battery, Grid, Output; Day kWh, Cumulative kWh, Date, Time					
Indications	Battery Charging/ Discharging, Grid ON, Load ON, UPS ON, Array ON, Fault LED Indicator (For Overload, Low Battery, Over Temperature),					
Setting	Battery type, Battery voltage (Boost & Float), Priority (SGB/SBG), Charging Current from Grid					
ENVIRONMENT						
IP Protection Level	IP-21					
Operating Temperature (°C)	0-50 °C without any degradation					
Max. Relative humidity @ 25°C	Up to 95% (non-condensing)					
Max. Altitude above sea level without de-rating (m)	1000 m					
STANDARD COMPLIANCE						
Certifications	IEC 61683, IEC 60068-2(1,2 14, 30)					
GENERAL						
Dimension (W*D*H) [mm]	300x504x515			350x635x589	400x575x783	
Net Weight (Kg)	30	37	50	76.3	125	150

Technical specifications are subject to change without prior notice.

For more information

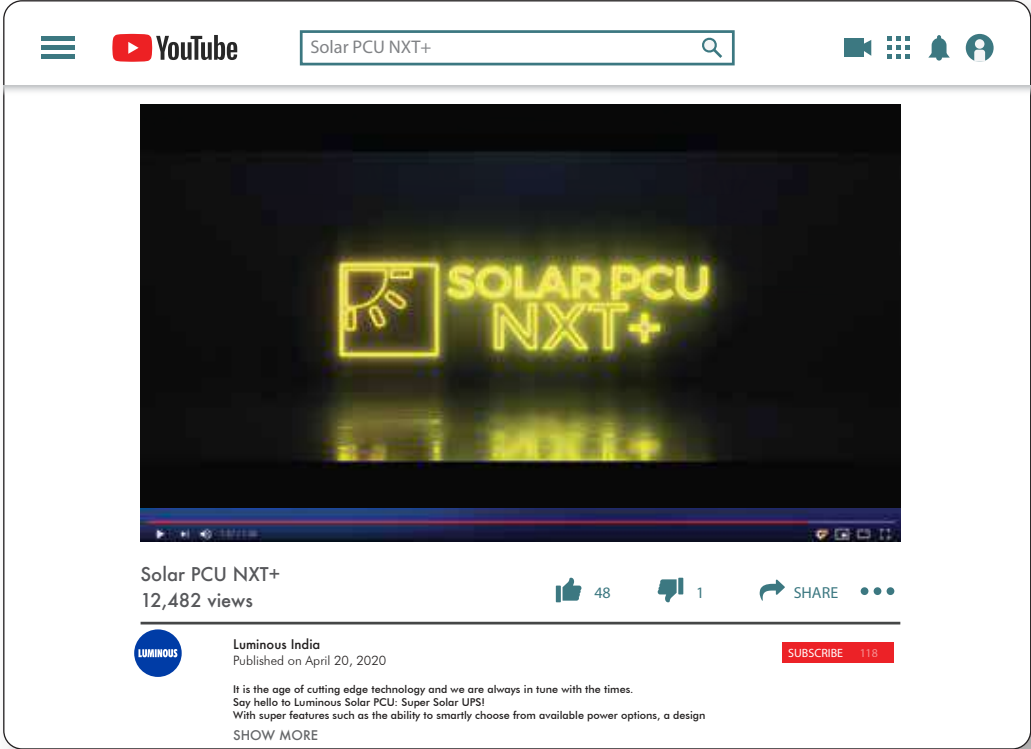

Subscribe to our Channel



youtube/user/myluminousindia

Follow our Social Media Channels & Visit our Website for Blogs, Videos & more product information.



LUMINOUS

HIGH CAPACITY COMBO

Solar solutions with tough build

Cruze & Shine combination runs heavy loads with extreme ease and efficiency.

Available from 2 KVA to 7.5 KVA

Warranty: 2 Years



Ideal For
Heavy Loads



User Friendly
Display



Run Heavy Loads

Runs heavy loads like Geyser, Petrol Pumps, Photocopiers, Dental Chairs etc.



Intuitive Display

Easy to understand display shows the status of mains availability, battery charging, battery level, etc.



Pure Sine Wave Output

Ensures noiseless operation and safety of connected appliances.

ABCC Technology

Adaptive Battery Charging Control System (ABCC) ensures faster battery charging and enhances battery life by 70%.



Guaranteed Safety

Comprehensive protection against short-circuit, reverse polarity, battery over-charge and battery deep-discharge.



Solar Estimation Chart

Solution			Panel Connection Combination (Series-Parallel)	Approx. Roof Top Area Required (Sq. ft.)
Solar UPS	Solar Battery	PV Panel Watt		
Cruze 2KVA + Shine 3650	150 Ah x 2	330Wp x 5 No.s	1 (S) 5 (P)	170
Cruze 2.5KVA + Shine 3650	150 Ah x 3	165Wp x 15 No.s	3 (S) 5 (P)	260
Cruze 3.5KVA + Shine 4850	150 Ah x 4	330Wp x 8 No.s	2 (S) 4 (P)	280
Cruze 5.5KVA + Shine 9650	150 Ah x 8	330Wp x 12 No.s	4 (S) 3 (P)	560
Cruze 7.5KVA + Shine 12050	150 Ah x 10	330Wp x 20 No.s	5 (S) 4 (P)	700

Technical Specifications

Model Name	Cruze 2 KVA+Shine 3650	Cruze 2.5 KVA+Shine 3650	Cruze 3.5 KVA+ Shine 4850	Cruze 5.5 KVA+ Shine 9650	Cruze 7.5 KVA+ Shine 12050	
Capacity	2000VA	2500VA	3500VA	5500VA	7500VA	
Nominal Battery Voltage (Vdc)	24V	36V	48V	96V	120V	
Output Waveform	Sine Wave					
SOLAR PHOTOVOLTAIC INPUT						
Charge Controller Type	PWM					
Charge Controller Rating	50 Amp/24V	50 Amp/36V	50 Amp/48V	50 Amp/96V	50 Amp/120V	
Maximum PV Power	Upto 1700Wp	Upto 2500Wp	Upto 2800Wp	Upto 5600Wp	Upto 7000Wp	
Input Voltage range (Voc)	38-55	57-75	70-92	140-185	170-230	
Input Voltage range (Vmp)	34-39	51-57	60-77	119-153	145-191	
GRID INPUT						
Operating Voltage Range	100V-285V	100V-285V	100V-285V	140V-280V	140V-280V	
Max Grid Charging Current	21Amp	21Amp	21 Amp	12Amp	12Amp	
PROTECTIONS						
Protections	Cruze	Overload, Short-circuit, Battery Deep Discharge Protection, & MCB Protection				
	Shine	Reverse polarity , reverse current , Over-voltage, Over-temperature protections				
DISPLAY INDICATIONS						
Indications	Cruze	Mains On, UPS On, UPS Overload, Battery Low, Battery Charging, Level of Battery Charge				
	Shine	PV & Grid status, Charging source, Battery type, Battery voltage, Savings				
GENERAL						
Net Weight (Kg)	Cruze	22.25	22.25	31.9	59.2	64
	Shine	3	3	4.5	5.7	5.7
Dimensions LxWxH (mm)	Cruze	280x305x280	280x305x280	280x305x380	588x341x347	600x350x360
	Shine	280x129x205	280x129x205	375x315x135	375x315x135	375x315x135

Technical specifications are subject to change without prior notice.

LUMINOUS


HIGH CAPACITY COMBO

Solar solutions with tough build


iCruze & Shine combination runs heavy loads with extreme ease and efficiency.

Available from 3kVA to 10kVA


Warranty: 2 Years (iCruze), 1 Year (Shine)



Efficient Heavy Load Handling



Stunning LCD Display



Intelligent Battery Charging



Efficient Heavy Load Handling

Runs heavy loads like Geyser, Petrol Pumps, Photocopiers, Dental Chairs etc.



User Friendly LCD Display

Easy to understand display shows the status of mains availability, battery charging, battery level, etc.



Pure Sine Wave Output

Ensures noiseless operation and safety of connected appliances.

Intelligent Battery Charging Algorithm

Optimizes the charging current according to the battery capacity



Guaranteed Safety

Comprehensive protection against short-circuit, reverse polarity, battery over-charge and battery deep-discharge.



Solar Estimation Chart

Solution			Panel Connection Combination (Series-Parallel)	Approx. Roof Top Area Required (Sq. ft.)
Solar UPS	Solar Battery	PV Panel Watt		
iCruze 3k + Shine 2420	150Ah x 2	330Wp x 2 No.s	2 (P)	80
iCruze 3k + Shine 3650	150Ah x 3	330Wp x 5 No.s	5 (P)	200
iCruze 4.5k + Shine 3650	150Ah x 3	165Wp x 15 No.s	3 (S) 5(P)	300
iCruze 9k + Shine 9650	150Ah x 8	330Wp x 16 No.s	4 (S) 4(P)	600
iCruze 10k + Shine 12050	150Ah x 10	330Wp x 20 No.s	5 (S) 4 (P)	700

Technical Specifications

Model Name	iCruze 3k + Shine 2420	iCruze 3k + Shine 3650	iCruze 4.5k + Shine 3650	iCruze 9k + Shine 9650	iCruze 10k + Shine 12050	
Capacity	2800VA	2800VA	4000VA	8100VA	9500VA	
Nominal Battery Voltage (Vdc)	24V	24V	36V	96V	120V	
Output Waveform	Sine Wave					
SOLAR PHOTOVOLTAIC INPUT						
Controller Type	PWM					
Charge Controller Rating	20 Amp/24V	50 Amp/24V	50 Amp/36V	50 Amp/96V	50 Amp/120V	
Maximum PV Power	Upto 800Wp	Upto 1700Wp	Upto 2500Wp	Upto 5600Wp	Upto 7000Wp	
Input Voltage range (Voc)	36-50	38-55	57-75	140-185	170-230	
Input Voltage range (Vmp)	31-39	34-39	51-57	119-153	145-191	
GRID INPUT						
Operating Voltage Range	100V-280V	100V-280V	100V-280V	140V-280V	140V-280V	
Max Grid Charging Current	20Amp	20Amp	20 Amp	20Amp	20Amp	
PROTECTIONS						
Protections	iCruze	Overload, Short Circuit, No Load shutdown, Over Temperature, Battery Low, Temperature Sensor Failed				
	Shine	Reverse polarity , reverse current , Over-voltage, Over-temperature protections				
DISPLAY INDICATIONS						
Indications	iCruze	Mains On, mode selector, fault indicator, battery charging/settings, back-up/battery charging time, load percentage, battery low, overload, mains/battery MCB trip, short circuit, no load shutdown (<5% for 11 hrs.)				
	Shine	PV & Grid status, Charging source, Battery type, Battery voltage, Savings				
GENERAL						
Net Weight (Kg)	iCruze	22.25	22.25	30.5	48	71.62
	Shine	1.2	3	3	5.7	5.7
Dimensions LxWxH (mm)	iCruze	300X326X284	300X326X284	300X417X452	300X487X452	300X471X560
	Shine	178x71x159	280x129x205	280x129x205	375x315x135	375x315x135

Technical specifications are subject to change without prior notice.

LUMINOUS


SOLAR INVERTERS

The Solar Ready UPS

NXG+ range is a hybrid UPS range that intelligently uses grid and solar power. With ability to operate in a wide voltage range, NXG+ is the ideal starter solar solution for homes.



2 Years
Warranty



Maximized Solar
Usage



User Defined
Settings



ISOT Technology

Intelligent Solar Optimization Technique (ISOT) maximizes solar energy usage in both backup and charging mode of operation.



Fast Charging

i-charge technology enables charging of batteries in a short time. This is a user defined setting.



ECO and UPS Mode

Choice between Eco mode that conserves battery (Ideal for low voltage areas) and UPS mode (Ideal for computer loads)

Safety and Protection

In-built protection against deep discharge, overcharge, excessive current and short-circuit.




Pure Sine Wave Output

Ensures noiseless operation and safety of connected appliances.



Solar Estimation Chart

Solution			Panel Connection Combination (Series-Parallel)	Approx. Roof Top Area Required (Sq. ft.)
Solar UPS	Solar Battery	PV Panel Watt		
NXG+ 750	120 Ah x 1	165 Wp x 2 No.s	2 (P)	40
NXG+ 1100	150 Ah x 1	165 Wp x 4 No.s	4 (P)	80
NXG+ 1400	150 Ah x 1	165 Wp x 4 No.s	4 (P)	80
NXG+ 1600	150 Ah x 2	330 Wp x 3 No.s	3 (P)	100

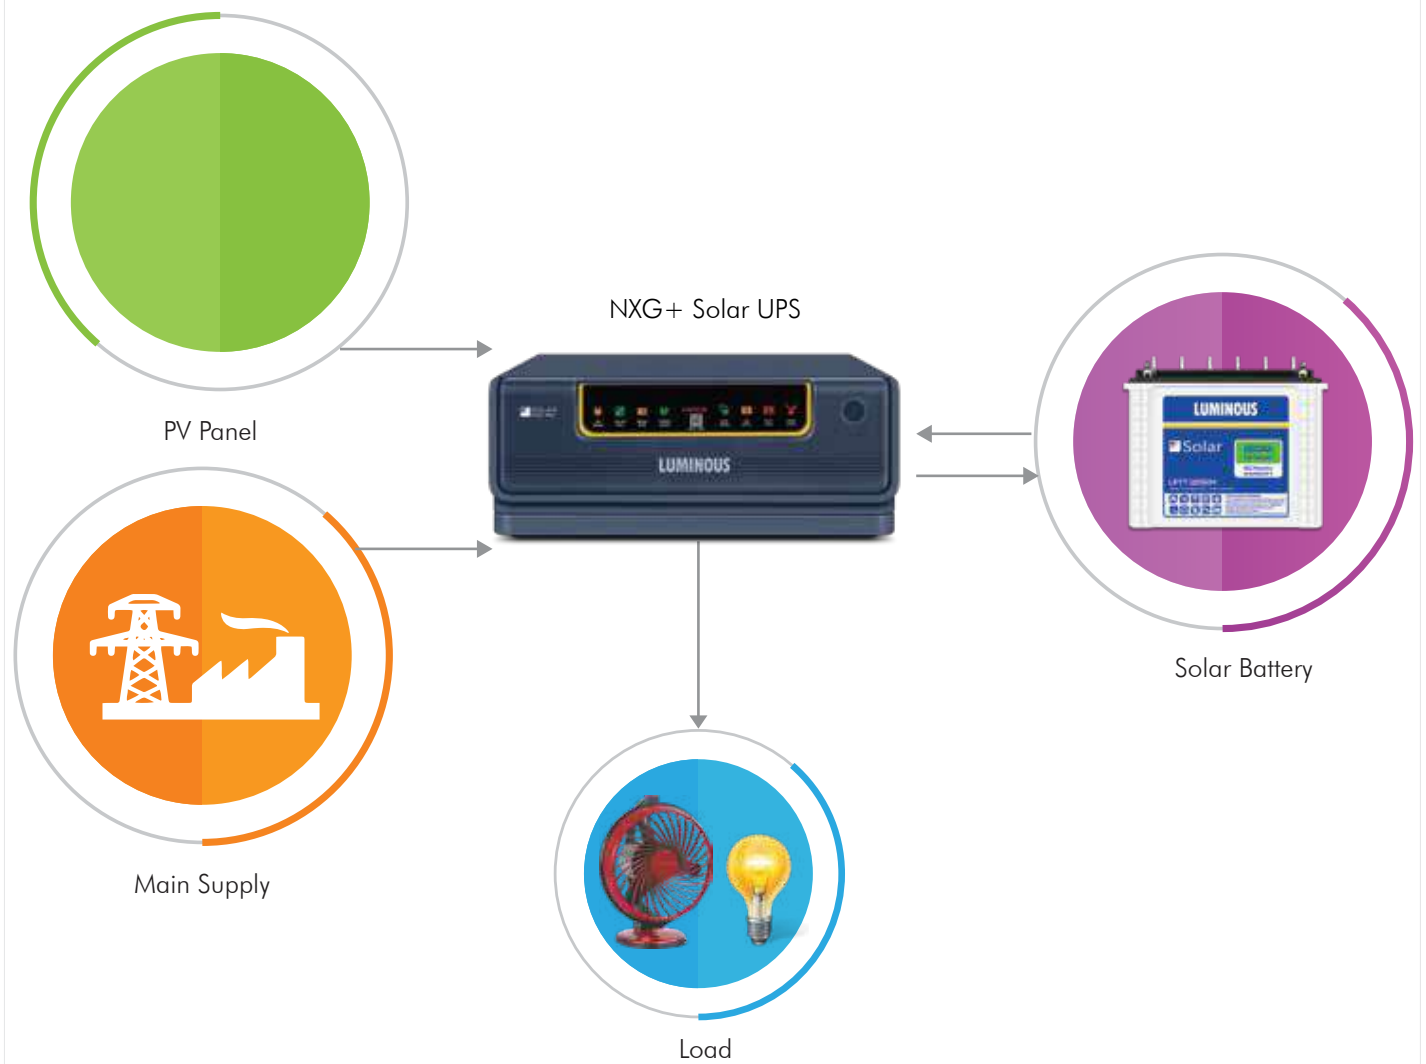

LUMINOUS

Technical Specifications

Model Name	NXG+ 750	NXG+ 1100	NXG+ 1400	NXG+ 1600
Nominal Battery Voltage (Vdc)	12V	12V	12V	24V
Output Waveform	Sine Wave			
SOLAR PHOTOVOLTAIC INPUT				
Charge Controller Type	PWM			
Charge Controller Rating	20Amp/12V	40Amp/12V	40Amp/12V	20Amp/24V
Maximum PV Power	12V upto 400 Wp	12V upto 800 Wp	12V upto 1000 Wp	24V upto 1000 Wp
Input Voltage range (Voc)	19-25	19-25	19-25	38-50
Input Voltage range (Vmp)	17-19	17-19	17-19	34-39
GRID INPUT				
Operating Voltage Range	100V-290V			
GRID OUTPUT				
No Load Output	230±10V	220±5V		
Output frequency battery mode	50Hz±0.5Hz			
No load current (UPS switch off)	< 65mA			
UPS efficiency	≥ 80%*			≥ 85%*
BATTERY				
Battery charging through Mains	Mains LED steady + Mains charge LED steady			
Battery charging through Mains + Solar	Mains LED steady+Mains charge LED steady+solar CHG LED steady/Blinking			
Battery charging through Solar	Solar CHG LED Blinking + Mains charge LED OFF			
Low battery pre-alarm indication	Battery low LED blinking			
Solar optimization after battery fully charged	ON mains+power save LED on+ON battery LED on+solar charge LED blinking			
PROTECTIONS				
Over load	110% - 150% for 30 Sec.	110% for 4.5 Min.	110% for 30 Sec.	110% for 4.5 Min.
	150%-180% for 10 Sec.	120% for 1 Min	120% for 5 Sec.	120% for 1 Min
	200%- Short circuit	150% for 10 Sec.	200% for 1 Sec.	150% for 10 Sec.
	NA	200% for 1 Sec.		200% for 1 Sec.
Overload shutdown indication in UPS mode	Overload LED steady			
Overload pre-alarm indication in UPS mode	Overload LED slow blinking			
Short circuit indication in UPS mode	Overload LED fast blinking			
Protections	Short circuit, overload, high temperature, battery low cut off			
Indications	Switch on, Battery Charging;mains, solar, mains+solar; Overload, Short circuit, i-charge			
Additional features	NA			
DISPLAY INDICATIONS				
Switch on indication	Switch LED ON			
UPS on indication	Battery LED ON			
Internal fault	NA	Service assistance LED on		
Mains on indication	Mains LED steady			
Mains charging current selection charge	6A (i-Charge Off)/ 10A (i-Charge ON)	10A (i-Chg OFF)/15A (i-Chg ON)		
DC overload indication	NA	(Mains LED+overload) blinking		NA
GENERAL				
Net weight (Kg)	9.3Kg	11.5Kg	14.6Kg	15.66Kg
Gross weight (Kg)	10.7Kg	12.7Kg	16.03Kg	16.90Kg
Dimensions LxWxH (mm)	375X315X135	375X315X135	375X315X150	375X315X150

*Peak Efficiency

Technical specifications are subject to change without prior notice.

For more information



Subscribe to our Channel



youtube/user/myluminousindia

Follow our Social Media Channels & Visit our Website for Blogs, Videos & more product information.



LUMINOUS

RETROFIT

Smart upgrade to Solar

Shine Retrofit is a smart upgrade that converts existing inverter into solar inverter without any change in existing wiring. Ideal for small to large systems <10KVA.



Solar Optimization



User Friendly Display



Solar Optimization Technique

Solar optimization technique extracts maximum power by intelligently prioritizing solar over grid.



LCD Display

User friendly displays communicates information like battery Charging Status, Charging Source, Total unit savings etc.



Warranty

1 Year warranty

Four Stage Charging

4-stage smart charging ensures fast, safe & efficient charging and longer battery life.




MCB Protection

World class MCB ensures your UPS and connected loads stay protected from short circuits.



Solar Estimation Chart

Solution			Panel Connection Combination (Series-Parallel)	Approx. Roof Top Area Required (Sq. ft.)
Solar UPS	Solar Retrofit	PV Panel Watt		
12V UPS	SHINE 1220	165Wp x 2 No.s	2 (P)	40
24V UPS	SHINE 2420	330Wp x 2 No.s	2 (P)	80
24V UPS	SHINE 3650	330Wp x 5 No.s	5 (P)	200
36V UPS	SHINE 3650	165Wp x 15 No.s	3 (S) 5 (P)	300
48V UPS	SHINE 4850	330Wp x 8 No.s	2 (S) 4 (P)	300
96V UPS	SHINE 9650	330Wp x 16 No.s	4 (S) 4 (P)	600
120V UPS	SHINE 12050	330Wp x 20 No.s	5 (S) 4 (P)	700

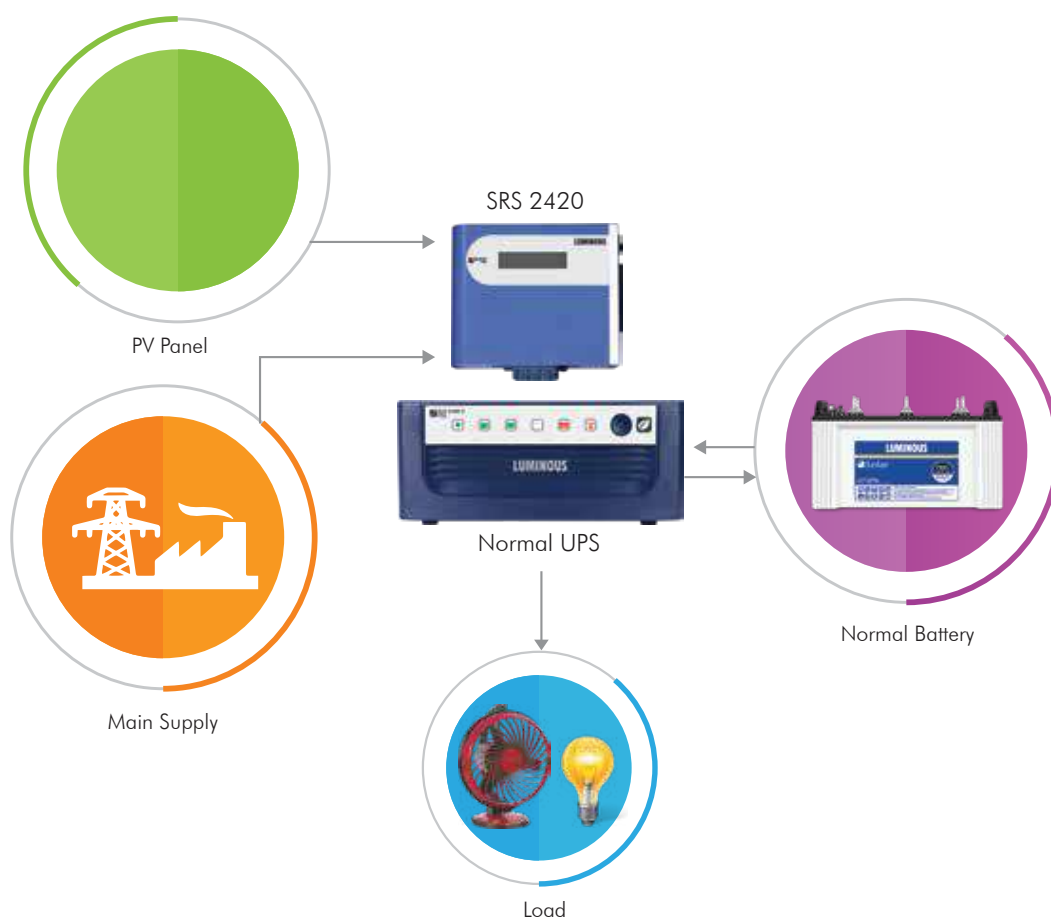

Technical Specifications

Model Name	Shine 1220	Shine 2420	Shine 3650	Shine 4850	Shine 9650	Shine 12050
Charge Controller Type	PWM					
Charge Controller Rating	20A @12V	20A @12V/24V	50A@24V/36V	50A @48V	50A @96V	50A @120V
Maximum PV Power	100Wp-400Wp @ 12V	100Wp-400Wp @ 12V 200Wp-800Wp @24V	250Wp-1700Wp @ 24V 375Wp-2500Wp @36V	Upto 2800 Wp	Upto 5600 Wp	Upto 7000 Wp
Input Voltage range (Voc)	17-25	17-25 @ 12V, 36-50 @ 24V	38-55 @ 24V, 57-75 @ 36V	70-92	140-185	170-230
Input Voltage range (Vmp)	15-21	15-21 @ 12V, 31-39 @ 24V	34-39 @ 24V, 51-57 @ 36V	60-77	119-153	145-191
Operating temperature range	0°C to + 45°C	0°C to + 45°C	0°C to 50°C	0°C to + 45°C	0°C to + 45°C	0°C to + 45°C
Power connection	30A Terminal Block	30A Terminal Block	65A Terminal Block	60A Terminal Block		
Dimension (mm)	178x71x159		280x129x205	375x315x135		
Wire size	6 Sq. mm	6 Sq. mm	10 Sq. mm	16 Sq. mm		
Weight (kg)	1.2	1.2	3	4.5	5.7	5.7

Technical specifications are subject to change without prior notice.

LUMINOUS

CHARGE CONTROLLER

Easy upgrade to Solar

Luminous Charge controllers provide an easy upgrade to solar for existing users of DC loads.



Protection Against Over-Charge and Reverse Current

Charges batteries from solar panels without permitting overcharge and also prevent reverse current flow at night.



Warranty
1 Year Warranty




USB Port

Charge your DC devices like Mobile, Tablets etc. directly without using adapter.

Solar Estimation Chart

Solution			Panel Connection Combination (Series-Parallel)	Approx. Roof Top Area Required (Sq. ft.)
Solar Charge Controller	DC Voltage	PV Panel Watt		
SCC 1206	@12V	105Wp x 1 No.s	1 (S)	10
SCC 1210	@12V	165Wp x 1 No.s	1 (S)	20
SCC 1210	@24V	330Wp x 1 No.s	1 (S)	40
SCC 1220	@12V	165Wp x 2 No.s	2 (P)	40
SCC 1220	@24V	330Wp x 2 No.s	2 (P)	80

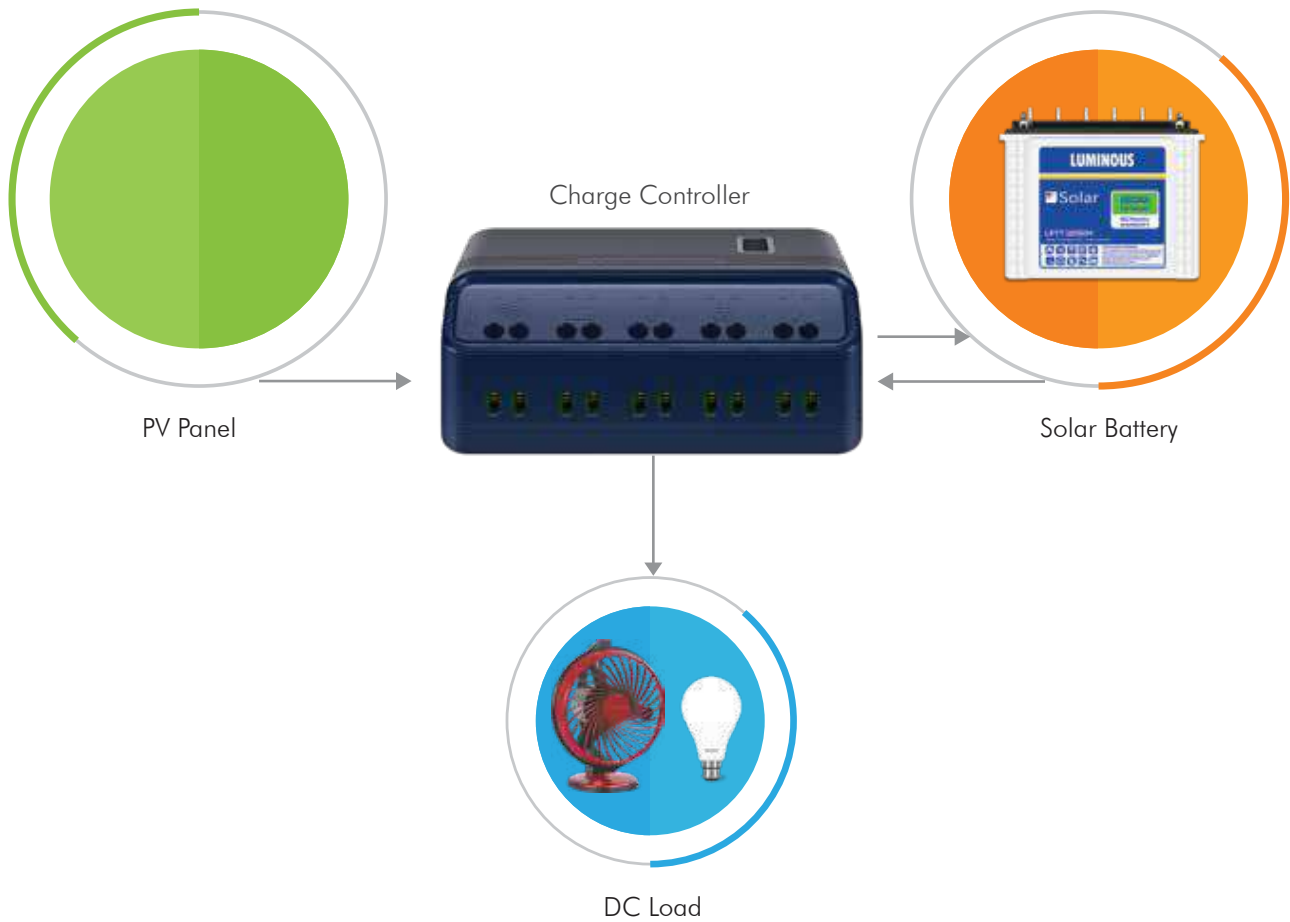

Technical Specifications

Model Name	SCC1206NM	SCC1210NM	SCC1220NM
Charge Controller Type	PWM		
Charge Controller Rating	6A @ 12V	10A @ 12V / 24V	20A @ 12V / 24V
Maximum PV Power	125Wp @ 12V	200Wp @ 12V/400Wp @ 24V	400Wp @ 12V/800Wp @ 24V
Input Voltage range (Voc)	17-25	17-25 @ 12V, 36-50 @ 24V	
Input Voltage range (Vmp)	15-21	15-21 @ 12V, 31-39 @ 24V	
Low voltage disconnect			
A) By state of charge	N.A	Available	
B) Controlled by voltage	Available		
Self consumption	Less than 10mA		
Efficiency:			
A) Charging	98.50%		96%
B) Load	98%		96%
Operating temperature range	0°C to 50°C		
Power connections	30 Ampere Terminal		
Battery type selection	Lead Acid & SMF		
Enclosure	ABS Plastic, IP21		
Dimensions (mm)	40 x 60 x 135 (L x W x H)		
Wire size	2.5 sq. mm	4 sq. mm	6 sq. mm
Net weight	275 gms	300 gms	350 gms

Technical specifications are subject to change without prior notice.

LUMINOUS


SOLAR BATTERY

Power of Performance


Luminous Solar Batteries are C10 rated deep cycle batteries specially designed for longer back up. Range Available - LMLA Tubular 20Ah to 200 Ah



Upto 5 Years
Warranty



Tubular Technology
for longer life



Rugged
Performance



Very Low Maintenance

Topping up frequency :
Once in 8 to 10 months



Long Design Life

Long cycles
(1500@80% DOD, 5000
@20% DOD)

High Temperature Performance

Can handle extreme
weather conditions



Technical Specifications

Model Name	Nominal Voltage	C10 capacity upto 10.5V 27°C	Length ± 3	Width ± 3	Height upto float top ± 3	Dry Weight ± 5%	Filled Weight ± 5%	Electrolyte Volume ± 5%
	V	Ah	mm	mm	mm	Kg	Kg	Litre
LPT1220L	12	20	260	172	248	8.5	13	3.6
LPT1240L	12	40	412	173	267	12	23.5	9.3
LPT1240H	12	40	412	173	267	12	23.5	9.3
LPT1260H	12	60	410	174	305	13.5	27	10.9
LPT1280H	12	80	505	220	277	24.0	37.5	11.7
LPTT12100L	12	100	502	191	440	23	53	22.2
LPTT12100H	12	100	502	191	440	25.5	53	22.2
LPTT12120H	12	120	502	191	440	27	54.5	22.2
LPTT12150L	12	150	502	191	440	34.5	60	20.6
LPTT12150H	12	150	502	191	440	34.5	60	20.6
LPTT12200L	12	200	502	191	440	40.5	67.5	21.8

Technical specifications are subject to change without prior notice.

*STC - Standard Test Conditions



UNMATCHED CUSTOMER SERVICE

Prompt and continuous support to keep your solar power generation system running. Our service in 300 cities trained professional 24x7 helpline make us the most powerful brand in India.

LUMINOUS

LUMINOUS

LUMINOUS

 /myluminous

 /user/myluminousindia


 /myluminous

 www.luminousindia.com

CONNECT

WITH US ON
SOCIAL MEDIA
TO EXPLORE
THE WORLD OF
LUMINOUS



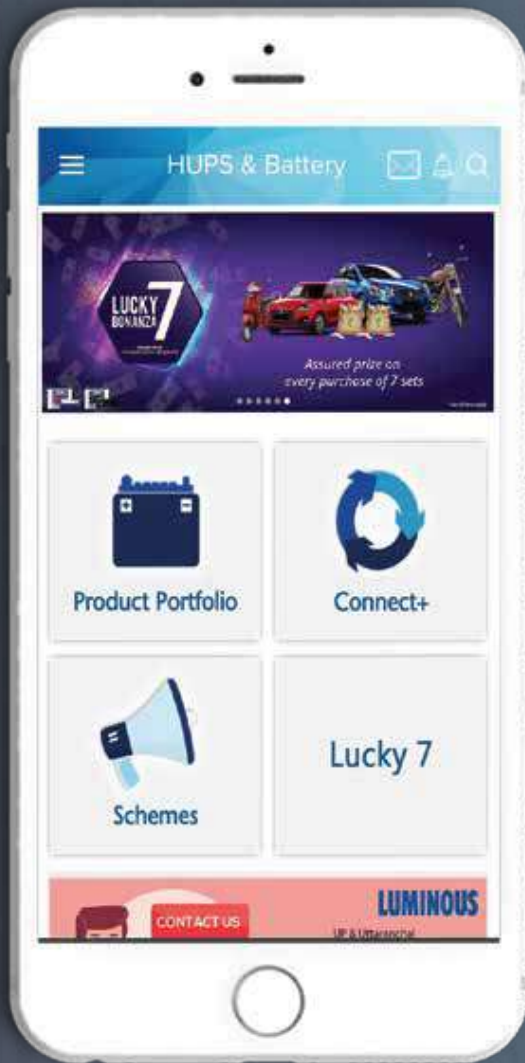

CONNECT WITH US ON MPARTNER APP TO GET INSTANT BUSINESS INFORMATION

Mpartner App

The Mpartner App is one stop solution for all your needs. App features- Luminous product catalogue, Connect+ entry and much more.

Follow below steps to start using Mpartner App:

- Download the Mpartner App from Google Play Store/App Store
- Login using Sap Code and OTP sent on you registered number

Key features



Product Catalogue

Beautiful rich product model wise listing.



Media

View all Luminous updates.



Schemes & Pricing

Single Window to view scheme and prices.



Luminous News

Stay update with latest Luminous news.



Connect+

Improved and easy connect+ process.



Load Calculator

New tool to calculate load.

Download the Mpartner App



You can also visit us at :www.luminouspartner.com

 **Solar**
Chalo India Bijli Banao

LUMINOUS

Luminous Power Technologies Pvt. Ltd.

Plot No. 150, Sector 44, Gurugram, Haryana - 122003

Tel.: +91-124-477 6700, E-Mail: care@luminousindia.com

 /myluminous |  /myluminous |  /myluminousindia |  www.luminousindia.com

LUMINOUS

Khushiyon ka ghar

WE MAKE
SOLAR
SIMPLE
FOR YOU



 solarbyluminous.com

GIVE A MISSED CALL AT
1800 103 5131

Luminous Heritage

After 3 decades of successful product heritage, Luminous today has a vast product portfolio comprising of power back up products and home electrical offerings. With 7 manufacturing units, more than 28 sales offices in India and presence in over 36 countries, our 6000 employees serve more than 60,000 channel partners and 70 million customers.

After sales service is what Luminous is known for. Its pan India network, 300 full fledged service centers, door step service, 24 hours response time, trained professionals, 24X7 call facility and affordable rates make it a force to reckon with.

And now, Luminous is assuring you of a simple and transparent solar journey by systematically managing each and every step!




SolarByLuminous Journey

Making Solar Simple

- End to End Solar Rooftop Solutions
- Destination for Distributed Requirements
- Professionally Managed Execution for Institutions, Businesses & Residential

Right Design, Designed Right

- Custom Design
- Conformance To Standards
- Premium Grade Products & Components
- Quality Workmanship

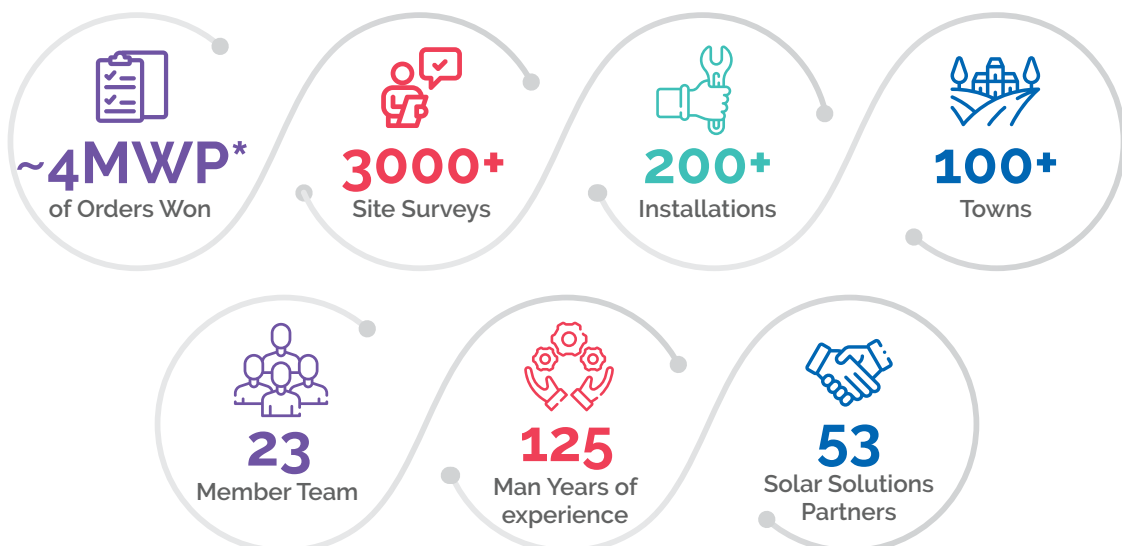

Luminous Advantage

Luminous assures you of a simple and transparent solar journey by systematically managing each and every step! From top of the line components to quality workmanship, Luminous is committed to delivering you an un-matched experience and complete peace of mind.

ONE STOP SOLUTION

Your worries end here!
Luminous shall take on end-to-end responsibility.
The right design, designed right!

LIFE TIME SUPPORT

From Site Surveys & Project Management to Post Installation requirement. We are always there!

EASY BUYING

Safe & Secure Online Payments.
Make your investment process simple & secure.
Choose from multiple financing options!

QUALITY WORKMANSHIP

Our robust processes and systems ensure that your Solar Rooftop Solution is of top-notch quality!




One Stop Solution For All Your Need

Luminous has come up with a one stop destination to fulfil all your solar needs – solarbyluminous.com - a portal which tells you what solar power generation is all about, lets you know what type of solution you need, how much you will end up saving and enables you to start your solar journey with just a click and be with you at each step ensuring a smooth solar experience...



Calculate savings
Using unique tool



Get top-notch
Solar solution design



Multiple options to
Avail financing



State-of-the-art
Installation &
Commissioning



Prompt after
Sales service



Get your solar
Solution insured

Grid-tied Solutions

Grid-tied solar solutions generate electricity which is used to run appliances and excess electricity if any, can be fed back to the grid. These systems maximize the solar utilization and give you savings on your energy bills.



5 Reasons to go for Grid-tied Solar Solutions

03

LOW MAINTENANCE

Grid-connected systems do not have any moving parts, and hence require low/zero maintenance

01

GREAT RETURNS

With net-metering you can sell the electricity you generate and reduce your electricity bills substantially.

05

GO GREEN

With solar, your electricity shall come pollution free, literally!

02

LOW(ER) INVESTMENT

Grid-connected systems do not incorporate batteries and are cheaper as compared with off-grid solutions.


04

REMOTE MONITORING

With Luminous Remote Monitoring, you can track your solar performance and earnings sitting in the comfort of your home or office.

Off-Grid Solutions

Off-Grid Solar solutions are power generation systems that harness solar energy and store it in batteries for later use. The off-grid systems are not dependent on your mains connection and reduce your dependence on the grid.

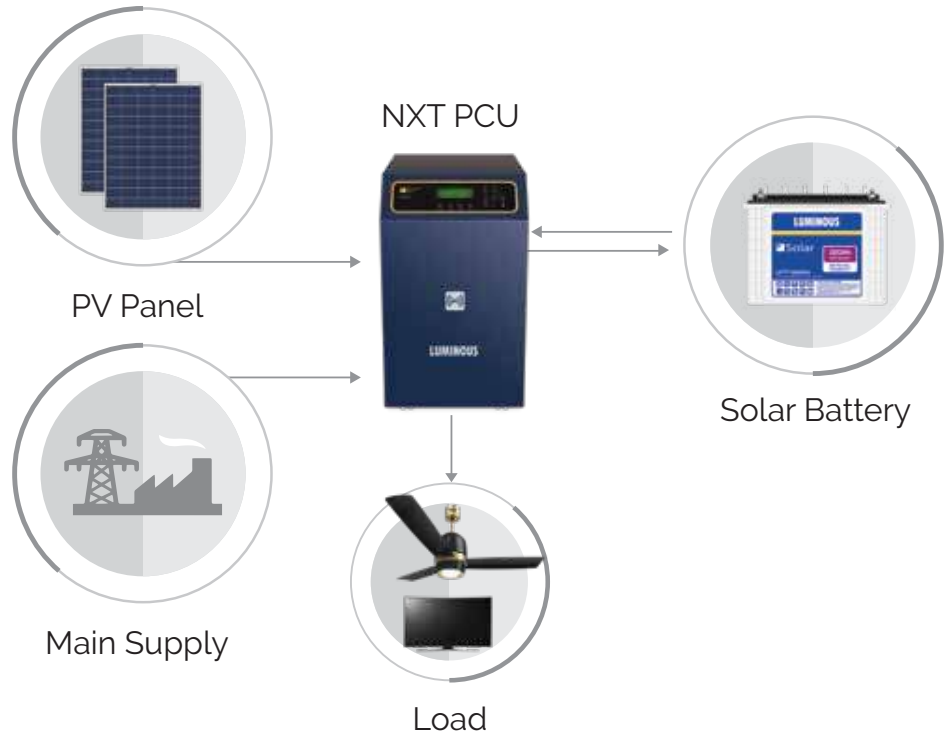

4 Reasons to go for Off-Grid Solar Solutions

01

POWER BACKUP

With off-grid solar you don't need to worry about power cuts. You can make your own electricity and store it in battery banks for later use.

02

DUAL CHARGING

With our Power Conditioning Unit (PCU), the batteries are charged through both solar and grid power. Thus you get electricity round the clock.

04

GO GREEN

With solar, your electricity shall come pollution free, literally!

03

SELECTABLE PRIORITY

You can set your own consumption priority Solar-> Battery -> Grid or Solar-> Grid-> Battery

Solar Solution Packages

	GOLD	SILVER	BRONZE*
Key Components			
Inverter	Luminous	Luminous	Luminous
PV Panel	Luminous	Other Indian	Other Indian
Balance of System			
Mounting Structure	Hot Dip GI	Pre-GI/POSMAC	MS/Pre-GI
Cables/Connectors/Conduits	Premium	Premium	Regular
SBL Protect			
Add-on Safety Features	Included ✓	Included ✓	Not Included ✗
Insurance	Included ✓	Included ✓	Not Included ✗
Care & Warranty Support	Complete ✓	Inverter + BoS ✓	Only Inverter ✓
Plant Health Check-up Visit	4 per year ✓	2 per year ✓	- ✗
SBL RealValue			
Installation	Included ✓	Included ✓	Included ✓
Net Meter Installation & Assistance	Included ✓	Included ✓	As per Actuals ✓
Financing Options	Available ✓	Available ✓	Not Available ✗
RMS Data Package	Included ✓	Not Included ✗	Not Included ✗

*We will match the best competition proposal along with Best installation and Quality workmanship.

Salient Projects



330kW_p Installation, Jaipur
Industry/Sector : Stone



55kW_p Installation, Kundli
Industry/Sector : Engineering



35kW_p Installation, Ghaziabad
Industry/Sector : Education



35kW_p Installation, Gurugram
Industry/Sector : Corporate Office




10 x 3kW_p + 90 x 1kW_p
Industry/Sector : NGO



5 x 10kW_p Installations, Chennai
Industry/Sector : Petroleum

Solar Rooftop Expertise

Luminous assures you of a simple and transparent solar journey by systematically managing each and every step! From top of the line components to quality workmanship, luminous is committed to delivering you an un-matched experience and complete peace of mind.



TYPE OF STRUCTURE

- High grade steel material IS: 2062-250MPA
- Hot Dip GI/POSMAC/Pre-galvanized, can withstand wind speed >180Km/Hr, structure thickness - member & section 2 to 3mm
- Adjustable angles for harnessing optimum solar energy
- Elevated structure – provides sufficient roof access for other uses
- Robust & Maintenance Free Rooftop Solution

EARTHING & CABLING

- 16 mm² Aluminum conductor cable (Designed as per Indian Standards, IS :3043), not GI wires strips
 - Safety from all types of electrical hazards
- Proper cable sizing to reduce generation losses & optimize performance
- TUV certified high quality Copper cables.



INSTALLATION

- Installation & commissioning by MNRE approved partners
- Best in class material, as per MNRE standards

AUDITS

- Multiple audits by Luminous solar experts during installation
- Products tested, validated & certified as per IS, IEC, TUV standards
- 4 free assessment visits by solar expert in 1st year
- Plant remotely monitored for entire first year




SAFETY

- Best in class safety standards to safeguard against occupational hazards
- Verified professionals
- Lightning arresters to prevent external electrical hazards
- All equipment follow IS:3043 norms to prevent electrocution or related hazards

Give a Missed Call at

1800 103 5131

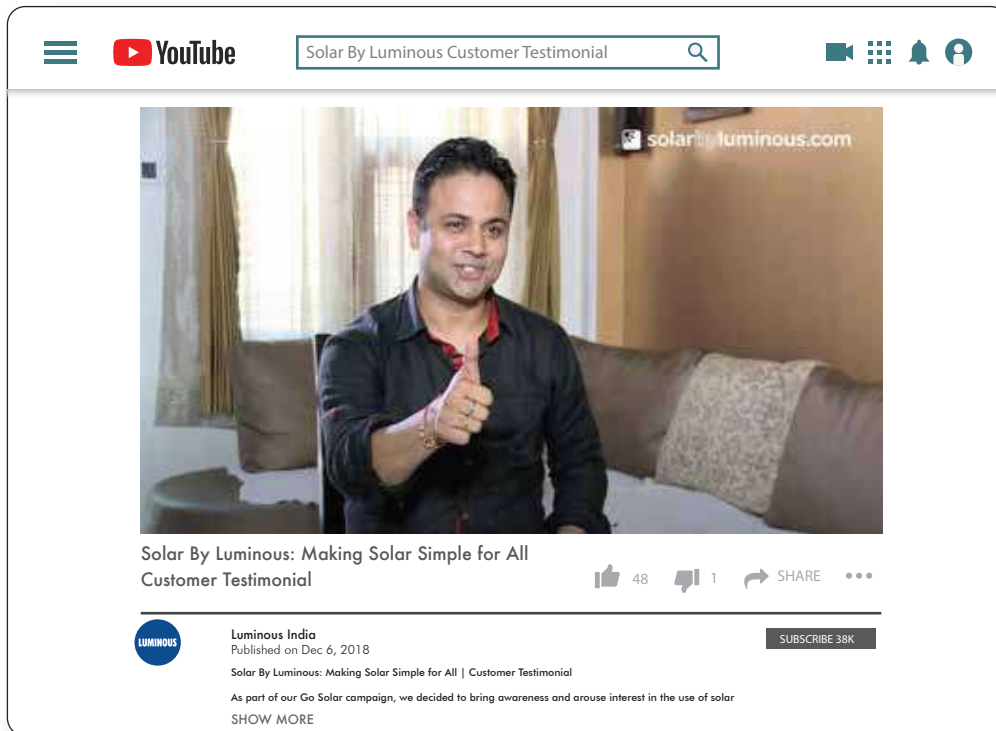

Scan the QR to watch on 



SBL Brochure / Mar21

LUMINOUS

Luminous Power Technologies Pvt. Ltd.

Plot No. 150, Sector 44, Gurugram, Haryana - 122003

Tel.: +91-124-477 6700 E-mail: solar@luminousindia.com

 /myluminous

 /myluminous

 /myluminousindia

 www.luminousindia.com

Photographs of the Products shown above are indicative only. Owing to continuous innovation and improvements, Actual product may vary in design, description, colors and color combinations from one shown herein. Care has been taken to ensure that information contained herein is correct and updated from time to time. Luminous Power Technologies Private Limited, however, takes no responsibility of the variations and reserves its right to make changes in the data/details, without any prior intimation or notice.

 solarbyluminous.com

The Luminous logo is displayed in a white rectangular box with a blue border, set against a dark blue background with a lightning bolt graphic.

LB Series



Delivering power when you need it the most.

Luminous Line Interactive UPS range is loaded with state of the art features that deliver continuous power supply and protect your computer and peripherals from power surges, drop in line voltage, brownouts, blackouts and other critical hazards. Smart Charge and Intelligent Continuous Charging Technology ensure longer battery life and faster charging. The entire range of Luminous Line interactive UPS Systems are generator compatible and equipped with built in Automatic Voltage Regulator which not only protects connected equipment but lets it run even when line voltage is too low or too high. At Luminous the onus is to empower you to protect your data and enable you to keep working without any hassle during unscheduled power outages.

Features:

- Micro Controller Based Design
- Generator Compatible
- Smart Charge + Intelligent Continuous Charging.
- Wide Input Voltage Window: 140V-300V
- Automatic Voltage Regulation
- Cold Start Capable: Allows PC to Boot on Battery
- Fire Resistance Capability.
- No Load Shutdown: Prevents Battery Deep Discharge *



Applications :

- Small Home & Office
- Digital Class Room Equipment
- LED TV & Set Top Box
- Router / Modem
- CCTV Surveillance
- Cyber Café
- Desktop / PC back up support

Model	LB600UNO	LB600PRO	LB800UNO	LB1000UNO
CAPACITY	600VA / 360 W		800VA / 480W	1000VA / 600W
INPUT				
Voltage	230 VAC			
Voltage Range	140~300 VAC			
Nominal Frequency	50Hz (Auto Sensing)			
OUTPUT				
Voltage Regulation	230 V ± 10%			
Frequency Range(Batt.Mode)	50~60 HZ ± 1Hz			
Transfer Time	Typical 4-8 ms, 13 ms max			
Waveform	Simulated Sine Wave			
BATTERY				
Type & Number	12V/7.2AHx1	12 V/7.5AHx1	12V/7.2AHx2	
Charging Time	4-6 hours up to 90% capacity			
EFFICIENCY	94%			
Display - Indicator				
AC Mode	Solid Green LED			
Battery Mode	Flashing Yellow LED			
Fault Mode	Solid Red LED			
PHYSICAL				
Dimension - DxWxH (mm)	279 x 101 x 142		350 x 146 x 160	
Net Weight (Kgs)	4.2	4.4	7.9	
ENVIRONMENT				
Operating Humidity	0-90 % RH @ 0-40 C (non-condensing)			
Noise Level	Less than 40dB			
WARRANTY				
Electronics	2 Years	2 Years	2 Years	2 Years
Battery	1 Year	2 Years	1 Year	1 Year

Specifications are subject to change without prior notice, due to continuous product improvements.

* This feature is available only on the 600VA UPS

IS 16242 (Part1):2014



R-41015563



Luminous Power Technologies Pvt. Ltd.

Plot No. 150, 2nd Floor, Sector – 44, Opp. Gold Souk,
Gurgaon -122016, Haryana, India

Phone: +91-1244 776756, Fax: +91-124 2544170

For more information call Toll Free: 1800 103 3039 / 1860 500 3939

E-mail: care@luminousindia.com Website: www.luminousindia.com